

TANFOGLIO



All Eric Grauffel SARL products and Fratelli Tanfoglio Srl products must be installed by a fully qualified professional gunsmith trained with the fitting, function and safe operation of firearms.


DO NOT attempt to install these parts yourself.

Tanfoglio Xtreme Hammer Setup Guidelines

1/ Install the hammer strut and interruptor if hammer is intended to be installed in a double action pistol. Drop the hammer inside the frame.



2/ Sear: We recommend you to install your hammer with a brand new sear to avoid malfunctions after installation. Check the back of your sear and make sure the sear is sharp. Remove burrs if needed. The safety side corner must be adjusted to fit in the thumb safety notch. The thumb safety must properly engage the hammer cocked, but also hammer down for double action pistols. This operation is mandatory!

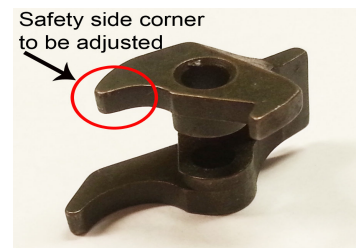

3/ Install all frame parts. It is recommended to glue or Loctite the trigger screws to prevent them moving during operation, and to regularly check these screws during the maintenance of your firearm.

4/ It is strongly recommended to use the Tanfoglio Xtreme Firing Pin with the Tanfoglio Xtreme Hammer in order to have optimal ignition of your ammo.